

The L9657-03 UV source is a UV lamp designed to check the operation of UVTRON flame sensors which are widely used for fire alarm and combustion monitoring devices. Since the L9657-03 is very small and highly reliable in lighting up, it can be assembled with a UVTRON into existing devices to check UVTRON operation easily and accurately. Checking UVTRON operation helps improve the reliability of the devices that use UVTRON flame sensors.

SPECIFICATIONS

GENERAL

Parameter	Description / Value	Unit
Spectral distribution	185 to 400	nm
Window material	UV glass	—
Weight	Approx. 1	g

MAXIMUM RATINGS

Parameter	Description / Value	Unit
Supply voltage (DC)	600	V
Peak current ①	200	μA
Operating/storage temperature range	-20 to +60	°C

RECOMMENDED OPERATING CONDITIONS AND CHARACTERISTICS (at 25 °C)

Parameter	Description / Value	Unit
Discharge starting voltage (DC) (Max.)	260	V
Recommended supply voltage (DC)	300	V
Recommended discharge current	150	μA
Guaranteed life ②	1000	h

NOTES:

- ① Operating at a current higher than this value may drastically shorten the operating life.
- ② Life end is defined as the time that the radiant intensity falls to 50 % of its initial value.

Figure 2: Directivity (light distribution)




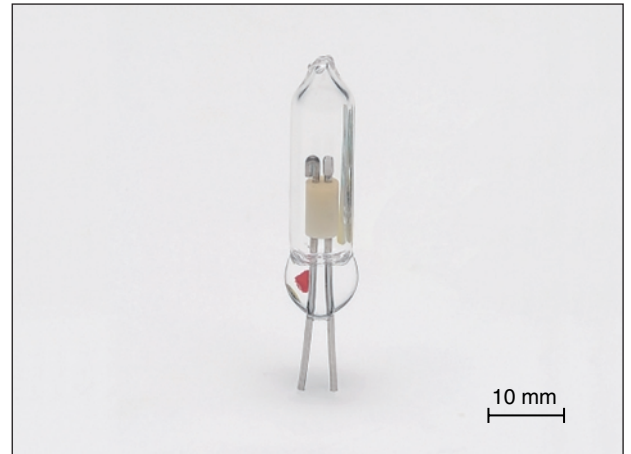


Figure 1: Spectral distribution

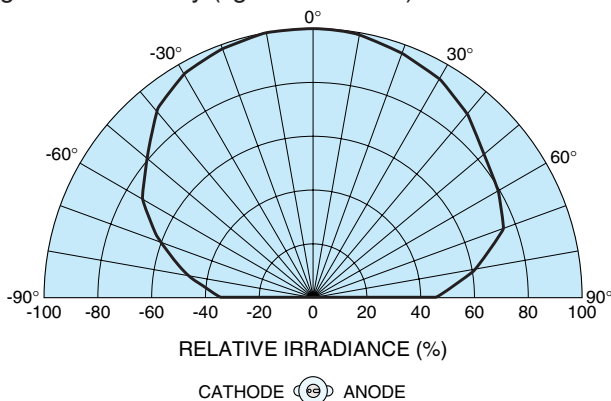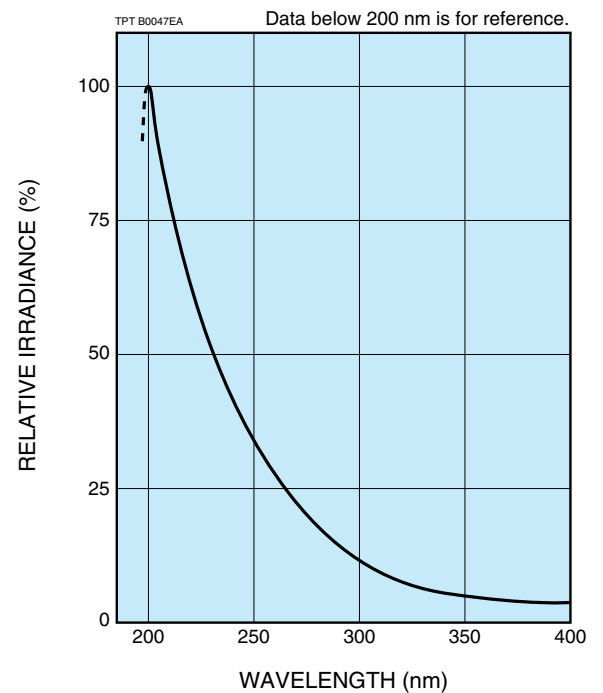

● Measurement image

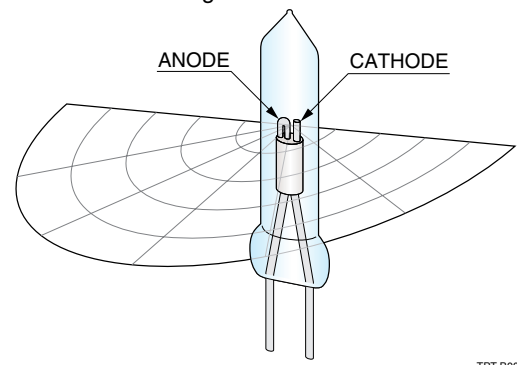

CHECKER LAMP FOR UVTRON® UV SOURCE L9657-03

Figure 3: Dimensional outlines (Unit: mm)


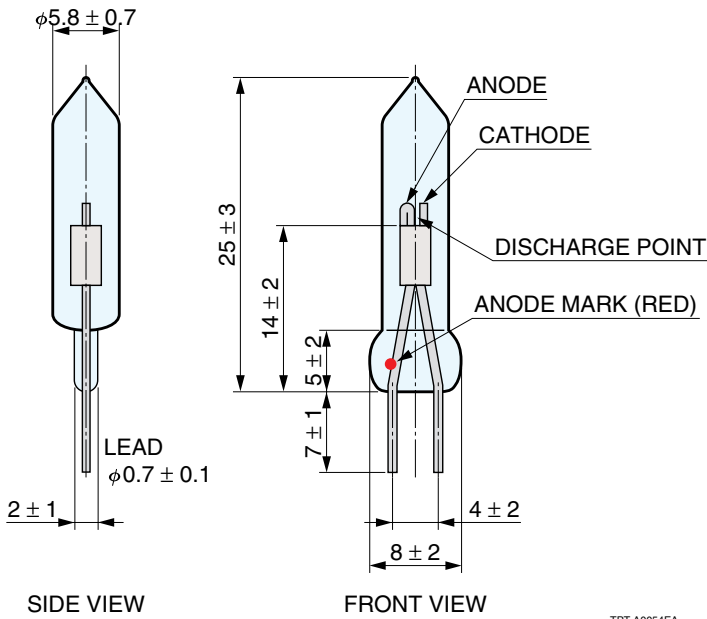


Figure 4: Recommended operating circuit

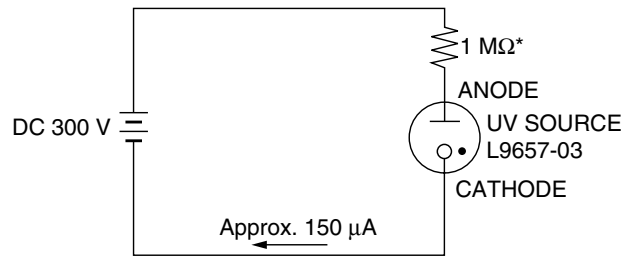

* This 1 MΩ resistor must be connected within 1 cm from the end of the anode lead of the L9657-03 UV source.

TPTC0031EA

■ HANDLING PRECAUTIONS

● Soldering

When mounting the L9657-03 on a printed circuit board, solder the leads as quickly as possible (350 °C within 5 seconds). If the leads are heated excessively, the glass bulb may crack and the performance characteristics may deteriorate.

● Vibration and shock

The L9657-03 is designed to pass vibration and shock tests in compliance with IEC 60068-2-6 (sinusoidal vibration test: 1.5 mm peak to peak, 100 m/s², 10 Hz to 500 Hz) and IEC 60068-2-27 (shock test: 1000 m/s², 11 ms). However, if subjected to strong mechanical shocks such as drop impacts, the glass bulb might crack or the internal electrode deform, causing poor electrical characteristics. So use extreme caution when handling.

● Polarity

The L9657-03 has an anode and cathode, so be sure to connect them with the correct polarity. Mistakenly reversing the connection polarity may cause malfunction or breakdown.

● Use in the dark

Avoid using the L9657-03 in the dark at an illuminance of 50 lx or less.

If used in the dark, a delay of 0.5 seconds or more may occur between the ON signal and the start of operation.

● Use after long-term storage

The amount of ions inside the bulb decreases after a long period of storage and this may cause the discharge starting voltage to increase and a delay in lighting up as in the case in the dark. So before using the L9657-03 after long-term storage, make sure that it lights up properly.

■ WARRANTY

The L9657-03 is covered by a warranty for a period of one year after delivery. The warranty is limited to replacement of the defective product. Even if within one year after delivery, the warranty will not cover any defect when the operating time has exceeded the guaranteed life. The warranty will also not cover any malfunction or trouble caused by improper use or natural disaster.

* UVTRON is a registered trademark of Hamamatsu Photonics K. K.

HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: info@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshammsgatan 35 SE-164 40 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93581733, Fax: (39)02-93581741 E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: B1201 Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No.158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)03-659-0080, Fax: (886)07-811-7238 E-mail: info@tw.hpk.co.jp

TPT 1032E01
MAR. 2016 IP