



LED


Rich variety of light emitters for wide range of applications

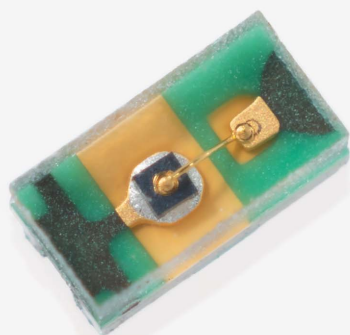

■ Surface mount type LED
L12509-0155G

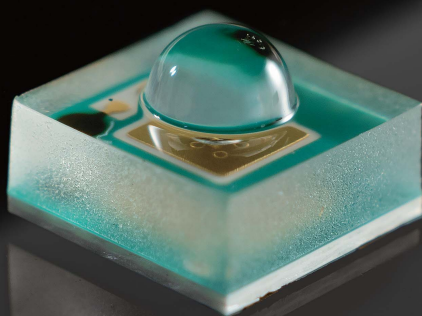

■ Surface mount type LED with lens
L14096-0085GL

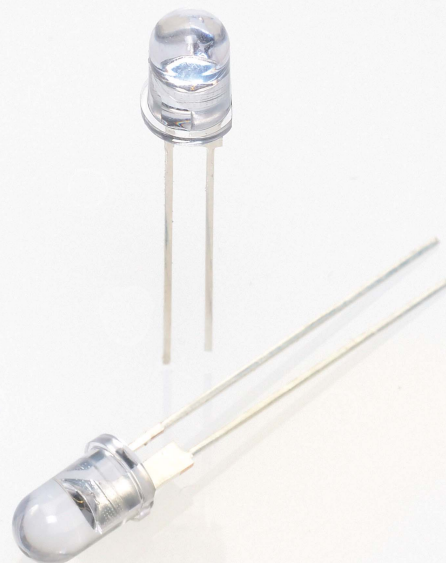

■ Bullet-shaped LED
L12170


LED

LEDs are opto-semiconductors that convert electrical energy into light energy. LEDs offer the advantages of low cost and a long service life compared to laser diodes (LDs).

LEDs are grouped into visible LEDs and invisible LEDs. Visible LEDs are mainly used for display or illumination, where LEDs are used individually. Invisible LEDs, however, are mainly used with photosensors such as photodiodes or CMOS image sensors.

Hamamatsu provides various LEDs from red to mid infrared range, which are mainly used in combination with photosensors.

Based on crystal growth technology and process technology supporting numerous compound semiconductor materials, we provide a product lineup that covers various wavelengths. The products feature high quality and high reliability backed by strictly controlled assembly process and inspection process.

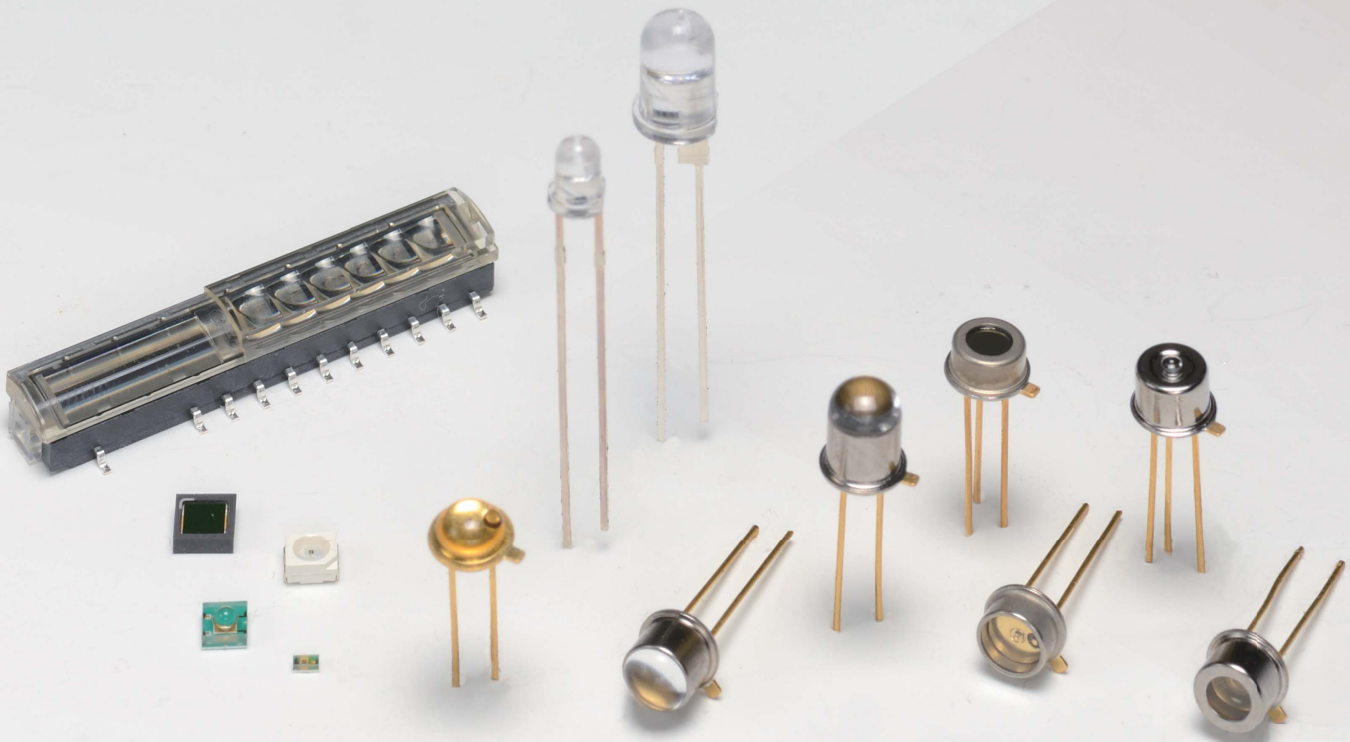

Contents

- Product lineup 3
- Application examples 4
- Selection guide 5
- Directivity (typical examples)..... 9

Features of Hamamatsu LEDs

● Product lineup that covers a wide variety of wavelengths


Product	Peak emission wavelength	Main applications
Red LED	650 to 700 nm	Optical switch, POF data communication, barcode reader
Near infrared LED	830 to 945 nm	Optical encoder, optical communication (optical fiber communication, FSO), optical switch
	1.2 to 1.55 μm	Moisture measurement, analysis, near infrared lighting
Mid infrared LED	3.3 to 4.3 μm	Gas detection

● Wide variety of packages

Package type	Characteristics
Metal	High reliability
Plastic	Low cost
Surface mount type	Compact, thin case
With lens	Narrow directivity
For high output	High heat radiation

● Custom devices available



In addition to changes in specifications of catalog products, fully customized products that entail new epitaxial wafer crystal growth can be provided.



Thin-film crystal growth under ultra-high vacuum in MBE equipment




Thin-film crystal growth with MOCVD equipment




Product lineup

Hamamatsu Photonics offers various packages of LEDs that support different wavelengths and light outputs.

Wide-ranging product lineup

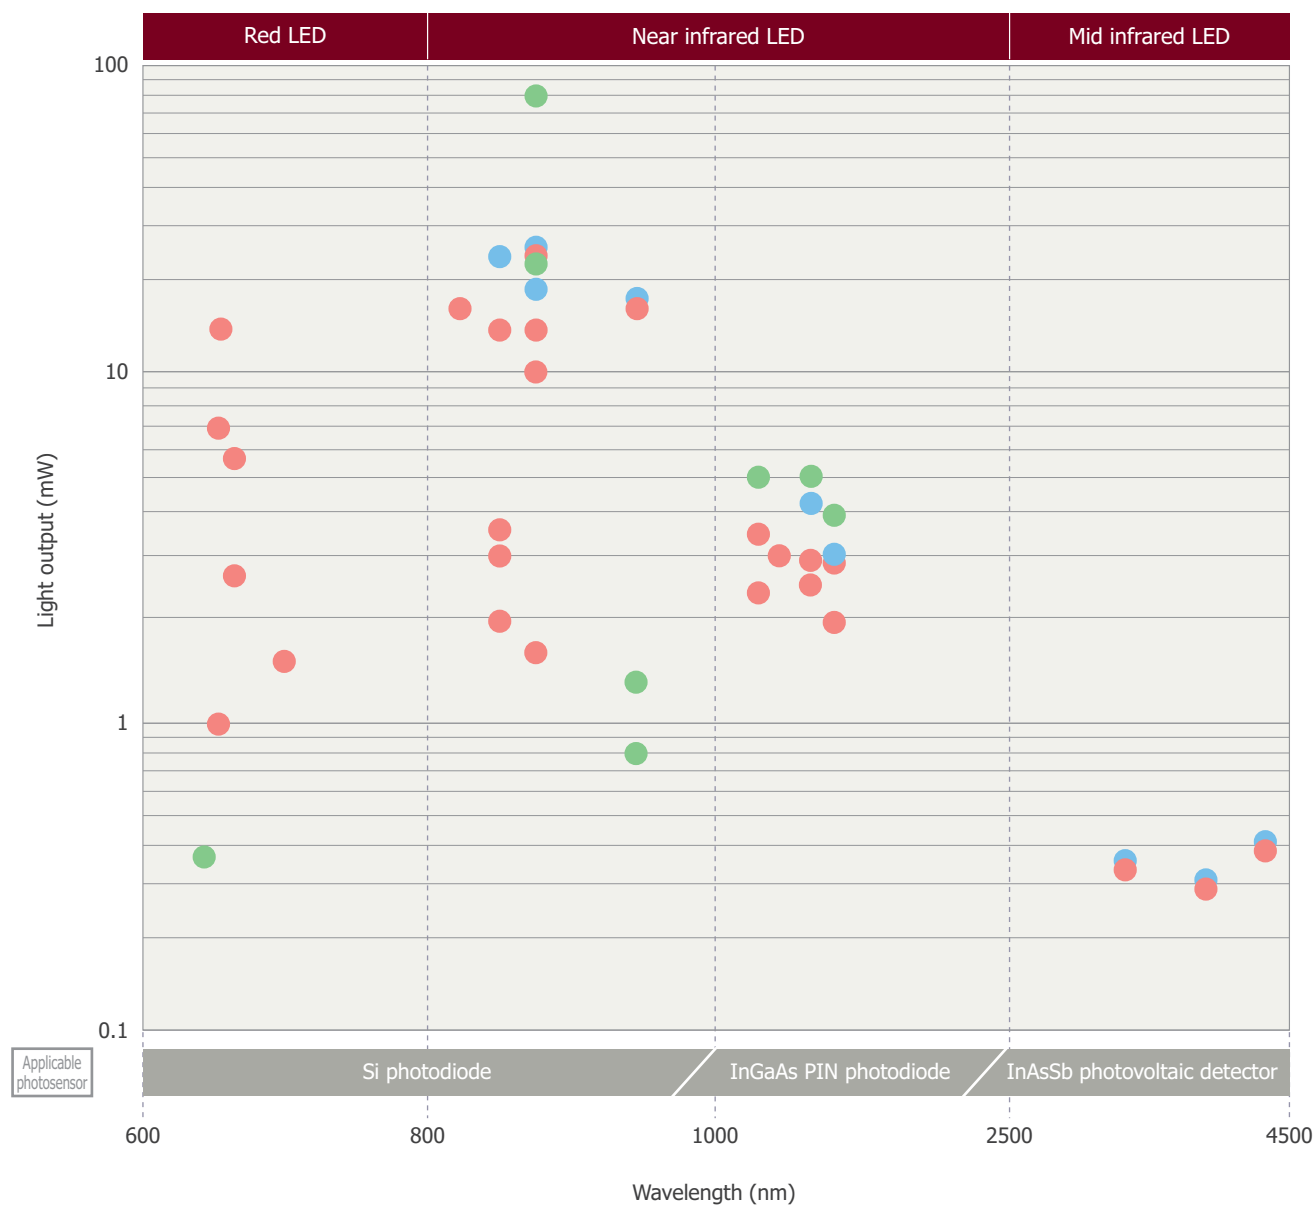


● Metal packages



● Plastic packages



● Surface mount types




Note: For details on directivity, see pages 9 and 10.

Application examples

VICS


Light emitting/
receiving module

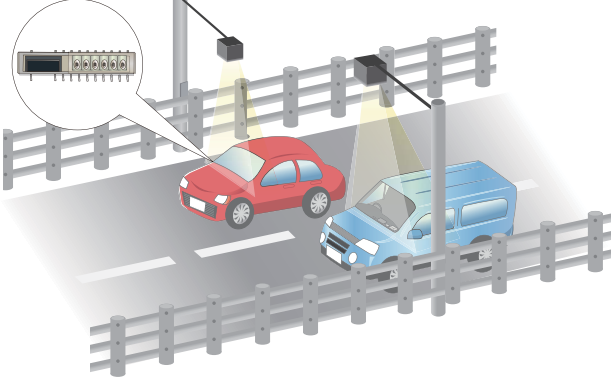

KLEDC0029EB

Light emitting/receiving modules with built-in LEDs and a photodiode are embedded in VICS (Vehicle Information and Communication System) in-vehicle devices.


Encoders

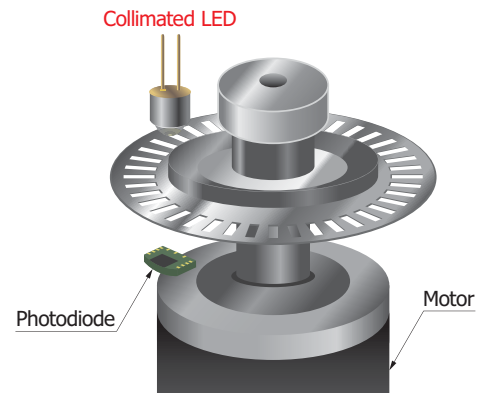

KLEDC0054EA

Optical transmission encoders require a collimated LED to achieve high accuracy.


Optical communication

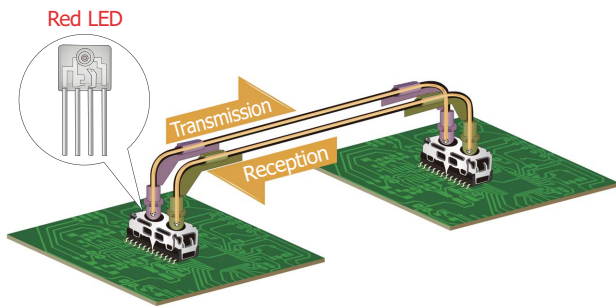

KLEDC0055EA

LEDs are used for POF (plastic optical fiber) communications and FSO (free space optics).

Lighting for infrared cameras

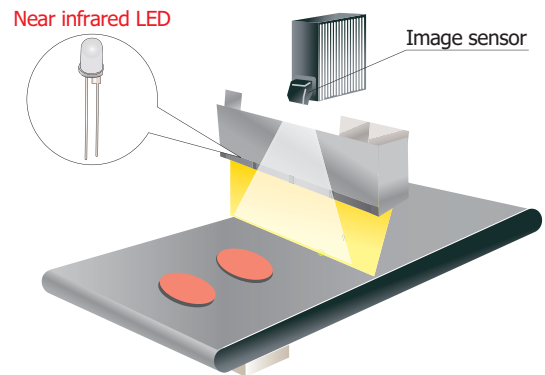

KLEDC0056EA

Infrared LEDs with large output are used as light sources for infrared camera imaging. These LEDs are arranged around the camera.

Skin moisture measurement



KLEDC0057EA

Compact near infrared LEDs are used for measuring skin moisture levels.

Gas detection











KLEDC0058EA

Mid infrared LEDs are used for CO₂ density measurements in plant factories.

Selection guide

Red LED












Red LEDs have a peak emission wavelength in the 660 to 700 nm range. They are used in a wide range of applications including optical switches, POF data communication, and barcode readers. Various types are available including a type with a reflector (cavity) on the metal base to increase the irradiance, a type with lens featuring narrow directivity, and a type that can irradiate over a wide range without a reflector.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Emission area (mm)	Radiant flux (mW)	Forward voltage (V)	Cutoff frequency (MHz)	Measurement condition	Photo	Directivity (P.9, 10)	Features	Application examples
							Forward current (mA)				
L10762	660	15	φ0.4	1.0*1	1.9	70	20		⑧	High fiber end output	POF data communication
L11767		18	□0.31	13	2.1	6			①	High output, wide directivity	Optical switches
L11767-0066L			φ4.65	7					⑤	High reliability, narrow directivity	
L6108	670	25	□0.25	5.5	1.8	5	20		①	Wide directivity	Optical switches
L6112			φ1.15						②	Wide directivity	
L6112-01			φ4.65	2.5					⑤	High reliability, narrow directivity	
L6112-02			φ1.15						③	High reliability, wide directivity	
L10363	700	20	φ4.65	1.4	1.7	5	20		⑤	High reliability, narrow directivity	Optical switches

*1: POF core diameter= $\phi 1$ mm, length=1 m, Z (distance between the cap surface and the fiber end)=0.3 mm

Near infrared LED (830 to 945 nm)















These near infrared LEDs have a peak emission wavelength in the 830 to 945 nm range. They are used in a wide range of applications including optical switches, optical fiber communication, FSO, optical rangefinders, near infrared lighting, and encoders. A wide product lineup (high output, high-speed response, superior collimation, current confinement type with mini light spot, high reliability type for in-vehicle applications, etc.) is available.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Emission area (mm)	Radiant flux (mW)	Forward voltage (V)	Cutoff frequency (MHz)	Measurement condition Forward current (mA)	Photo	Directivity (P.9, 10)	Features	Application examples
 L14336-0083R	830	40	φ0.75	16	1.5	20	50		②	High output	Optical switches
L11913	850	25	φ4.65	3.4*2	1.45	20	20		⑥	High reliability, superior collimation	Encoders
L13141-0085K		30	φ0.11	2.8	1.7	25	50		⑦	Wide directivity, current confinement type	Optical switches
L13142-0085K		35	φ0.4	3					⑧	Narrow directivity, current confinement type	
L13142-0085L		30	φ4.65			⑥		Narrow directivity, current confinement type			
L13814-0085K		30	φ0.05		2	25			⑦	Current confinement type, mini light spot	
L14096-0085GL		25	φ1.4	23	20			⑫	High output, narrow directivity		
 L14337-0085R		45	φ0.75	13	1.5	50			②	High output, high-speed response	
L8013	870	45	φ1.15	45 μV*3	1.45	50	30		⑦	Easy fiber alignment	POF data communication
L9337			φ0.75	23	1.42	40	50		②	High output	Optical switches
L9337-01			φ4.65	13					⑤	High reliability, narrow directivity	
L9337-02			φ0.75	10					③	High reliability, wide directivity	
L9437			φ4.65	1.6*2	1.5	30		⑥	High reliability, superior collimation	Encoders	
L9725-01			φ2.4	23	1.45	40	50		⑭	High output, surface mount type	In-vehicle
L10843		□0.39	50					①	High output, wide directivity	Optical switches	
L11368-01		35	φ1.7	65 μV*4	2	50	50		④	Current confinement type	Optical communication
L12170		45	φ5.0	80	1.45	40	200		⑨	Large current, high output, narrow directivity	Near infrared lighting
				1200	2.4		3000*5				
L12171-0087G			□0.24	18	1.55		50		⑪	Surface mount type, compact	Optical switches
L12756		φ3.0	23	1.5	0.3				⑩	High output, narrow directivity	Near infrared lighting
L14097-0094GL	940	40	φ1.4	60	2.5	10	50		⑬	Large current, High output	Near infrared lighting
			1200	3.0	1000*5						
L9338	945	60	φ0.75	15	1.34	0.3	50		②	High output	Optical switches
L9726			φ2.4		1.35				⑭	High output, surface mount type	In-vehicle

*2: light output *3: PCF200 fiber end output *4: GI50 fiber end output *5: Pulse value=10 μs, duty ratio=1%







Near infrared LED (1.2 to 1.55 μm)

These high output near infrared LEDs have a peak emission wavelength at 1 μm or higher. 1.2 μm , 1.3 μm , 1.45 μm , and 1.55 μm peak emission wavelength types are available. They are used for moisture measurements, analysis, near infrared lighting, and so on. Various packages (metal package, with lens, bullet-shaped) are available.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Emission area (mm)	Radiant flux (mW)	Forward voltage (V)	Cutoff frequency (MHz)	Measurement condition	Photo	Directivity (P.9, 10)	Features	Application examples
							Forward current (mA)				
L13072-0120K	1200	80	φ1.15	2.2	1.1	15	50		③	High reliability, high output	Analysis, near infrared lighting
L13072-0120L			φ4.65	3.2					⑤		
L13072-0120P			φ3.0	5					⑩	High output, narrow directivity	
L12771	1300	90	φ1.15	2.8	1	15	50		③	High reliability, high output	Analysis, near infrared lighting
L12771-01			φ4.65	3.1					⑤		
L10660	1450	120	φ1.15	2.4	1	15	50		③	High reliability	Moisture measurement, near infrared lighting
L10660-01			φ4.65	2.8					⑤		
L13895-0145P			φ3.0	5	0.9	10			⑩	High output	
L13895-0145G			□0.31	4					⑪	Surface mount type, compact	
L12509-0155K	1550	120	φ1.15	1.9	0.8	15	50		③	High reliability, high output	Analysis, near infrared lighting
L12509-0155L			φ4.65	2.7					⑤		
L12509-0155P			φ3.0	3.8					⑩	High output	
 L12509-0155G			□0.31	3					⑪	Surface mount type, compact	

Mid infrared LED


Mid infrared LEDs with peak emission wavelengths in the middle infrared region (3.3 μm , 3.9 μm , 4.3 μm) feature high output and are used for gas detection. They are used in combination with quantum type detectors such as InAsSb photovoltaic detectors.

Type no.	Peak emission wavelength	Spectral half width	Emission area	Radiant flux	Forward voltage	Rise time max.	Measurement condition	Photo	Directivity	Features	Application examples
	(nm)	(nm)	(mm)	(mW)	(V)	(μs)	Forward current QCW mode (mA)		(P.9, 10)		
L13771-0330M	3300	300	□1.04	0.25	2.1	1	50		③	High reliability	Methane detection
L13771-0330C									⑮	Surface mount type	
L13454-0390M	3900	500		0.2	1.7		80		③	High reliability	Reference light source for gas detection
L13454-0390C									⑮	Surface mount type	
L13201-0430M	4300	700		0.3	1.6				③	High reliability	CO2 detection
L13201-0430C									⑮	Surface mount type	

LED array (2-chip type)


This LED array incorporates a 670 nm red LED chip and an 870 nm near infrared LED chip.

It is provided in a surface mount type, compact package (3.5 × 2.8 × 1.8 mm) and is suitable for optical switch light sources.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Radiant flux (mW)	Forward voltage (V)	Cutoff frequency (MHz)	Measurement condition Forward current (mA)	Package
L10922	670	25	4	1.8	3	20	
	870	45	18	1.47	40	50	

Light emitting/receiving module




This VICS in-vehicle module employs six 870 nm LED chips and one Si photodiode in a plastic package.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Pulse radiant intensity*1 (mW/sr)	Pulse forward voltage*1 (V)	Cutoff frequency (MHz)	Measurement condition Pulse forward current (mA)	Package
P12793	870*2	45*2	1550	6.7	15	900	

*1: 64 kHz, duty ratio=50%, 4 ms ON, average peak value during pulse operation *2: If=100 mA

SIP type LED

These LEDs are provided in a compact, plastic package with the LED chip molded in transparent resin and with a lens.

Type no.	Peak emission wavelength (nm)	Spectral half width (nm)	Radiant flux (mW)	Forward voltage (V)	Measurement condition Forward current (mA)	Features	Package
L10881	650	25 max.	-4.5 dBm*3	1.9	20	High output for 156 Mbps optical link	
L5276	880	50	2.2	1.3	20	For optical switches	
L6286	940	45	0.8*4	1.25			
L6895-10	940	60	1.2*4	1.25	20	For encoders	

*3: fiber coupled optical power *4: minimum value


Directivity (typical examples)

The directivities of the representative products for each type of package are provided below. The directivity may vary to some degree between individual products.


For the directivity of individual products, refer to the datasheet.

○ Metal package


① Resin potted type (no reflector)

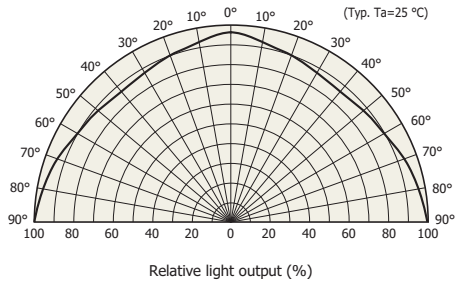

KLEDB0348EA




② Resin potted type (with reflector)

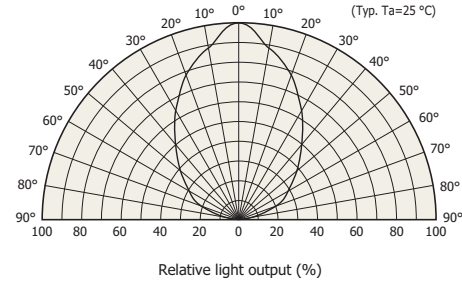


KLEDB0473EA




③ Flat cap

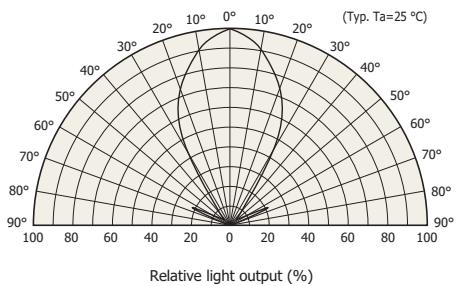

KLEDB0474EA




④ With mini lens

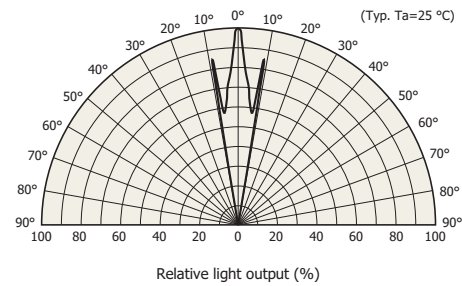


KLEDB0463EA




⑤ With lens

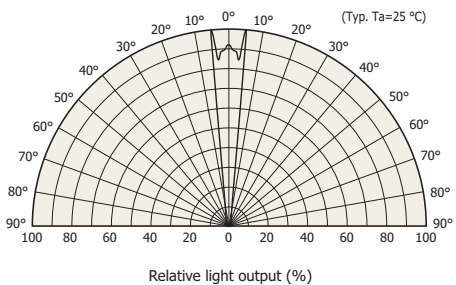


KLEDB0475EA




⑥ With lens (high collimation)

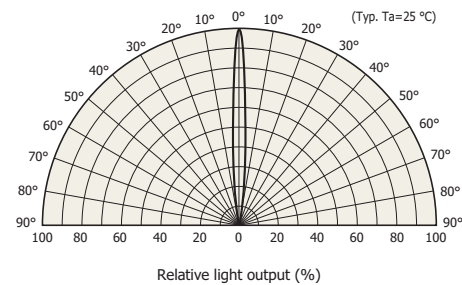


KLEDB0396EA




⑦ Low-profile flat cap

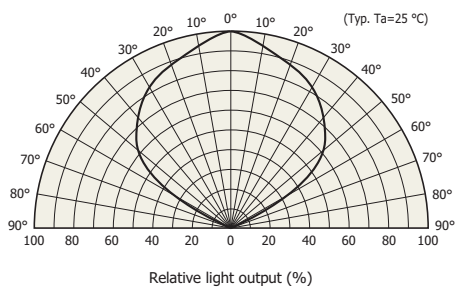

KLEDB0422EA



⑧ With ball lens

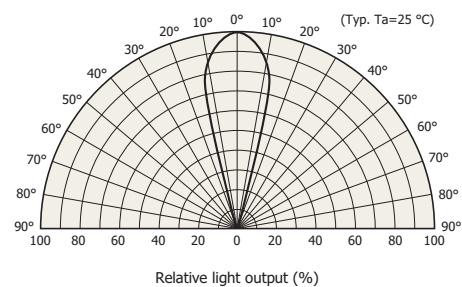


KLEDB0477EA



● Plastic package


⑨ Bullet-shaped ($\phi 5$ mm)

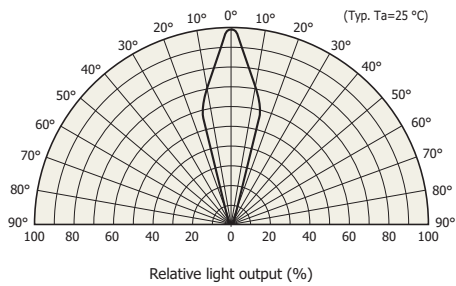

KLEDB0375EA



⑩ Bullet-shaped ($\phi 3$ mm)

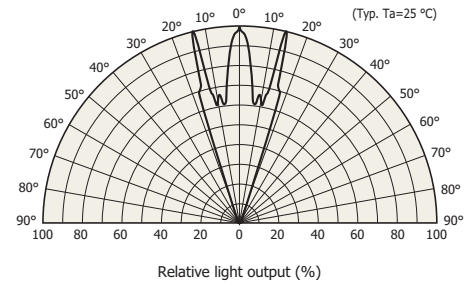


KLEDB0386EA



● Surface mount type


⑪ COB (chip-on-board)

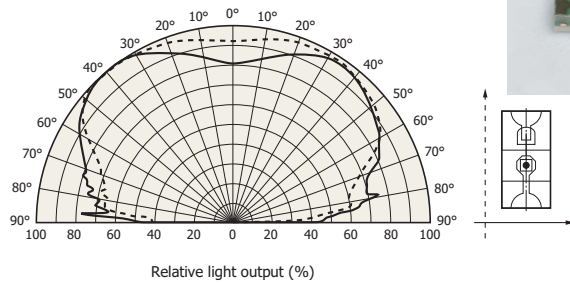


KLEDB0461EA




⑫ COB with lens

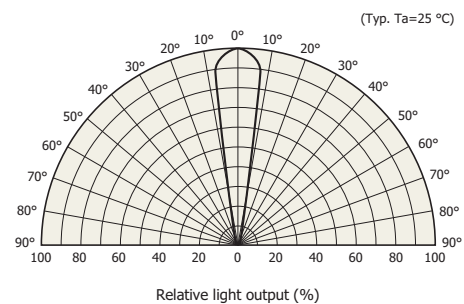

KLEDB0462EA




⑬ COB with lens (high output)

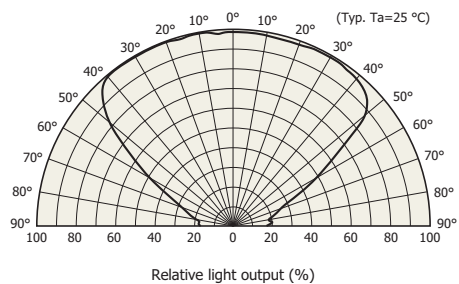


KLEDB0500EA




⑭ Premolded type

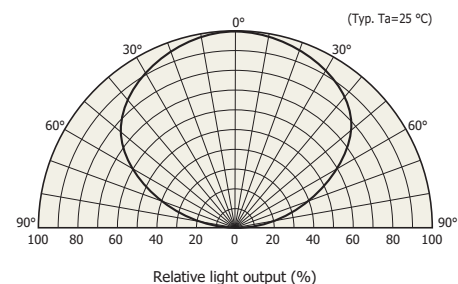

KLEDB0360EA



⑮ Ceramic type

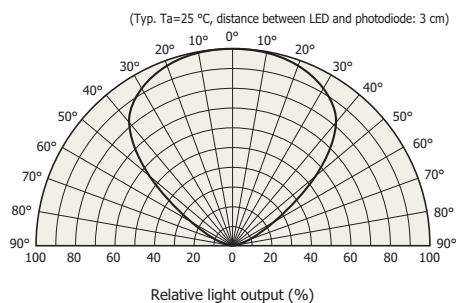

KLEDB0464EA



HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1, Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558, Japan

Telephone: (81)53-434-3311, Fax: (81)53-434-5184

www.hamamatsu.com

Main Products

Opto-semiconductors

Si photodiodes
APD
MPPC
Photo IC
Image sensors
PSD
Infrared detectors
LED
Optical communication devices
Automotive devices
X-ray flat panel sensors
Mini-spectrometers
Opto-semiconductor modules

Electron tubes

Photomultiplier tubes
Photomultiplier tube modules
Microchannel plates
Image intensifiers
Xenon lamps / Mercury xenon lamps
Deuterium lamps
Light source applied products
Laser applied products
Microfocus X-ray sources
X-ray imaging devices

Imaging and processing systems

Cameras / Image processing measuring systems
X-ray products
Life science systems
Medical systems
Semiconductor failure analysis systems
FPD / LED characteristic evaluation systems
Spectroscopic and optical measurement systems

Laser products

Semiconductor lasers
Applied products of semiconductor lasers
Solid state lasers

Information in this catalogue is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein.

© 2019 Hamamatsu Photonics K.K.

Quality, technology, and service are part of every product.

Sales Offices

■ Japan:

HAMAMATSU PHOTONICS K.K.

325-6, Sunayama-cho, Naka-ku,
Hamamatsu City, Shizuoka Pref. 430-8587, Japan
Telephone: (81)53-452-2141, Fax: (81)53-456-7889
E-mail: intl-div@hq.hp.k.co.jp

■ China:

HAMAMATSU PHOTONICS (CHINA) Co., Ltd.

Main Office
1201 Tower B, Jiaming Center, 27 Dongsanhuan Beilu,
Chaoyang District, 100020 Beijing, P.R.China
Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866
E-mail: hpc@hamamatsu.com.cn

Shanghai Branch
4905 Wheelock Square, 1717 Nanjing Road West,
Jingan District, 200040 Shanghai, P.R.China
Telephone: (86)21-6089-7018, Fax: (86)21-6089-7017

■ Taiwan:

HAMAMATSU PHOTONICS TAIWAN Co., Ltd.

Main Office
8F-3, No.158, Section2, Gongdao 5th Road,
East District, Hsinchu, 300, Taiwan R.O.C.
Telephone: (886)3-659-0080, Fax: (886)3-659-0081
E-mail: info@hamamatsu.com.tw

■ U.S.A.:

HAMAMATSU CORPORATION

Main Office
360 Foothill Road, Bridgewater, NJ 08807, U.S.A.
Telephone: (1)908-231-0960, Fax: (1)908-231-1218
E-mail: usa@hamamatsu.com

California Office
2875 Moorpark Ave. San Jose, CA 95128, U.S.A.
Telephone: (1)408-261-2022, Fax: (1)408-261-2522
E-mail: usa@hamamatsu.com

Chicago Office
4711 W.Golf Road, Suite 805, Skokie, IL 60076, U.S.A.
Telephone: (1)847-825-6046, Fax: (1)847-825-2189
E-mail: usa@hamamatsu.com

Boston Office
20 Park Plaza, Suite 312, Boston, MA 02116, U.S.A.
Telephone: (1)617-536-9900, Fax: (1)617-536-9901
E-mail: usa@hamamatsu.com

■ United Kingdom:

HAMAMATSU PHOTONICS UK Limited

Main Office
2 Howard Court, 10 Tewin Road, Welwyn Garden City,
Hertfordshire AL7 1BW, UK
Telephone: (44)1707-294888, Fax: (44)1707-325777
E-mail: info@hamamatsu.co.uk

South Africa Contact:
9 Beukes Avenue, Highway Gardens, Edenvale
1609 South Africa
Telephone/Fax: (27)11-609-0367

■ France, Portugal, Belgium, Switzerland, Spain:

HAMAMATSU PHOTONICS FRANCE S.A.R.L.

Main Office
19, Rue du Saule Trapu, Parc du Moulin de Massy,
91882 Massy Cedex, France
Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10
E-mail: infos@hamamatsu.fr

Swiss Office
Dornacherplatz 7, 4500 Solothurn, Switzerland
Telephone: (41)32-625-60-60, Fax: (41)32-625-60-61
E-mail: swiss@hamamatsu.ch

Belgian Office
Axisparc Technology, rue Andre Dumont 7
1435 Mont-Saint-Guibert, Belgium
Telephone: (32)10 45 63 34, Fax: (32)10 45 63 67
E-mail: info@hamamatsu.be

Spanish Office
C. Argenters, 4 edif 2 Parque Tecnológico del Vallés
08290 Cerdanyola (Barcelona), Spain
Telephone: (34)93 582 44 30, Fax: (34)93 582 44 31
E-mail: infospain@hamamatsu.es

■ Germany, Denmark, The Netherlands, Poland:

HAMAMATSU PHOTONICS DEUTSCHLAND GmbH

Main Office
Arzbergerstr. 10, D-82211 Herrsching am Ammersee,
Germany
Telephone: (49)8152-375-0, Fax: (49)8152-265-8
E-mail: info@hamamatsu.de

Danish Office
Lautruphøj 1-3, DK-2750 Ballerup, Denmark
Telephone: (45)70 20 93 69, Fax: (45)44 20 99 10
Email: info@hamamatsu.dk

Netherlands Office
Transistorstraat 7, NL-1322 CJ Almere, The Netherlands
Telephone: (31)36-5405384, Fax: (31)36-5244948
E-mail: info@hamamatsu.nl

Poland Office
8 St. A. Boboli Str. PL-02-525 Warsaw, Poland
Telephone: (48)22-646-0016, Fax: (48)22-646-0018
E-mail: poland@hamamatsu.de

■ North Europe and CIS:

HAMAMATSU PHOTONICS NORDEN AB

Main Office
Torshamnsgatan 35 16440 Kista, Sweden
Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01
E-mail: info@hamamatsu.se

Russian Office
11, Christoprudny Boulevard, Building 1, Office 114,
101000, Moscow, Russia
Telephone: (7)495 258 85 18, Fax: (7)495 258 85 19
E-mail: info@hamamatsu.ru

■ Italy:

HAMAMATSU PHOTONICS ITALIA S.r.l.

Main Office
Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy
Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41
E-mail: info@hamamatsu.it

Rome Office
Viale Cesare Pavese, 435, 00144 Roma, Italy
Telephone: (39)06-50 51 34 54, Fax: (39)02-93 58 17 41
E-mail: inforoma@hamamatsu.it



Cat. No. KLED0002E12
Jul. 2019 DN
Printed in Japan (1,800)