CAUTION !

TO ENSURE PROPER HEAT MANAGEMENT, MOUNT THE METAL-CORE PRINTED CIRCUIT BOARD (MCPCB) TO AN ADEQUATE HEAT SINK

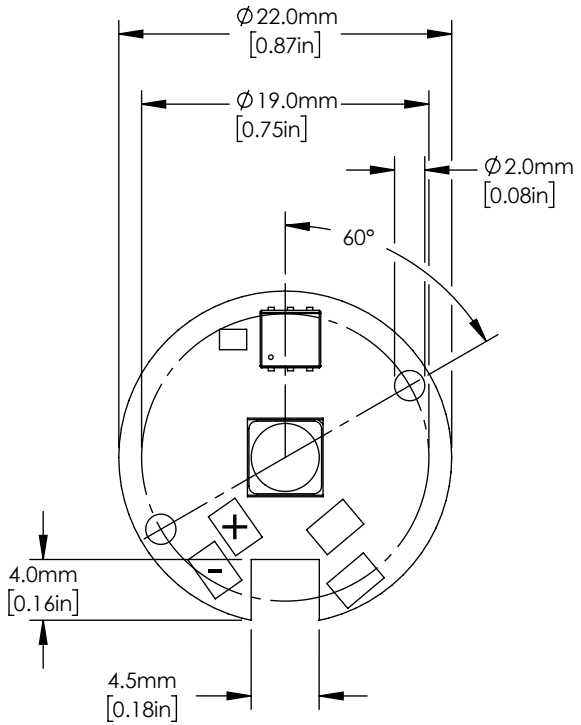

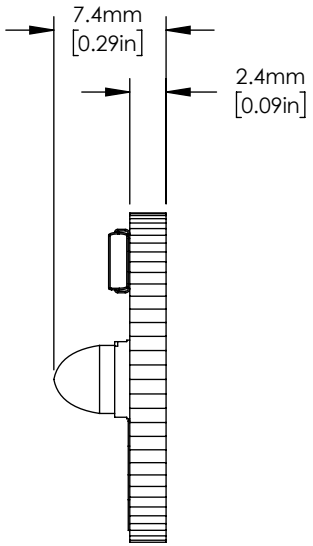



Item #	Color	Nominal Wavelength*	Minimum Power LED Output	Typical Power LED Output	Maximum Current (CW)	Forward Voltage	Bandwidth (FWHM)	Typical Lifetime	MCPCB Thickness	Risk Group According to the IEC Standard 62471:2006 **
M1650D2	IR	1650 nm	13 mW	16 mW	600 mA	1.1 V	120 nm	>10 000 h	2.4 mm	RG0 - EXEMPT GROUP

* The specifications listed in the table above are nominal values.
** Photobiolgical Safety of Lamps and Lamp Systems

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	Hit.	08/JAN/18
APPROVAL	SB	08/JAN/18

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1650nm LED ON MCPCB

MATERIAL	REV
-	B

ITEM #	APPROX WEIGHT
M1650D2	2 g