


NYLON-TIPPED LOCKING SCREW  
0.05in [1.3mm] HEX  
FOR SECURING OPTICS

1.8mm  
[0.07in]

ACCEPTS  $\varnothing$  10mm OPTICS  
2.0mm [0.08in] DEEP  
 $\varnothing$  8.8mm [ $\varnothing$  0.35in] CLEAR APERTURE

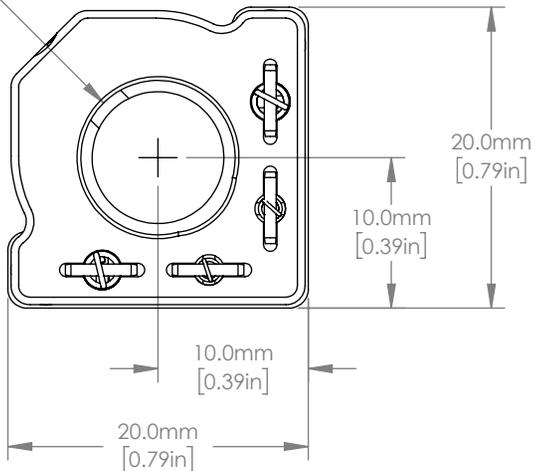


METRIC ID MARK



10.3mm  
[0.40in]  
NOMINAL  
15.6mm  
[0.62in]

M3 x 0.5 MOUNTING THRU HOLE  
2 PLACES @ 90°

10.0mm  
[0.39in]

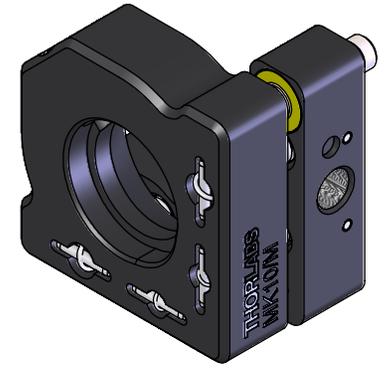

2.5mm  
[0.10in] M2.5 x 0.20 FINE ADJUSTMENT SCREW  
1.3mm [0.05in] HEX  
2 PLACES

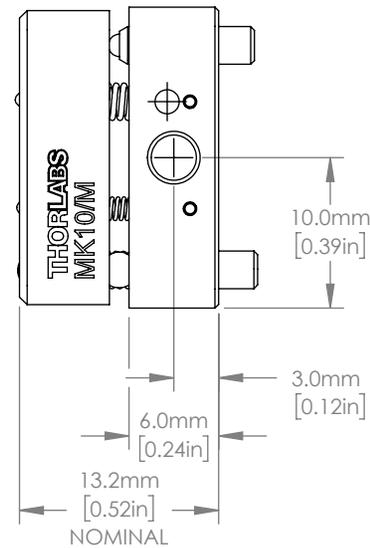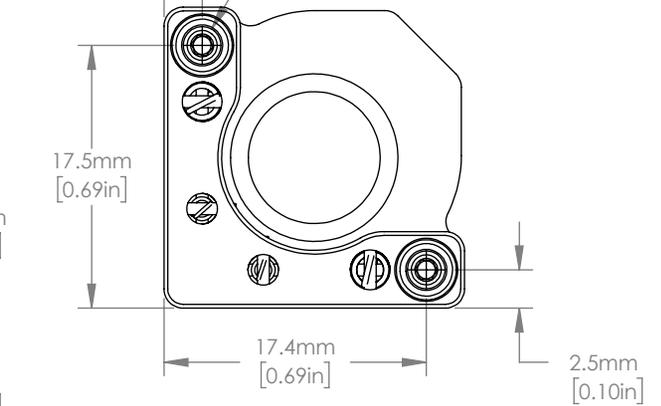

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION

	NAME	DATE
DRAWN	AK	26/MAY/17
APPROVAL	JC	27/MAY/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED  
AND MAY CONTAIN ROUND-OFF ERRORS

**THORLABS**  
www.thorlabs.com

MINI-SERIES  $\varnothing$  10mm KINEMATIC  
METRIC MIRROR MOUNT

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
MK10/M	6.7 g